

SALICE



IN STOCK SALICE GUIDE

Face Frame Soft Close Hinges

STOCK FACE FRAME SOFT CLOSE HINGE PART NUMBERS

1-1/4" Overlay


- CUP3AD9 - 2 CAM - WOOD SCREW
- CUP3AD9R - 3 CAM - WOOD SCREW
- CUR3AD9 - 2 CAM - DOWEL
- CUR3AD9R - 3 CAM - DOWEL

3/4" Overlay

- CUP34D9 - 2 CAM - WOOD SCREW
- CUP34D9R - 3 CAM - WOOD SCREW
- CUR34D9 - 2 CAM - DOWEL
- CUR34D9R - 3 CAM - DOWEL

1/2" Overlay

- CUP37D9 - 2 CAM - WOOD SCREW
- CUP37D9R - 3 CAM - WOOD SCREW
- CUR37D9 - 2 CAM - DOWEL
- CUR37D9R - 3 CAM - DOWEL

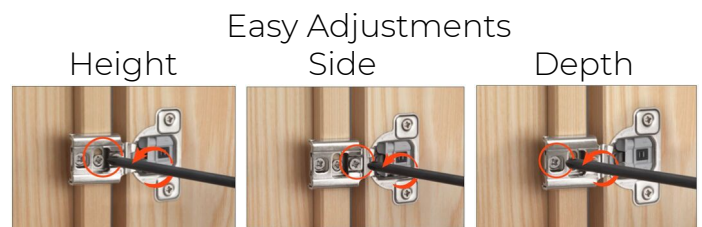

Height
Middle Screw
+/- 1.85 mm

Side
+2.5 mm
-1.8 mm

Depth
+2.5 mm
-0.5 mm


All overlays are calculated with a K = 2.5 mm.

All Silentia face frame hinges have an variable drilling distance (K) of 2.5 mm - 6.0 mm.


Boring Pattern

Boring distance from the edge of the door:

Press-in



Screw-in.



- LIFETIME WARRANTY
- IMM CUP DEPTH TO ACCOMMODATE DEEP EDGE PROFILES


ALL STOCK FACE FRAME SOFT CLOSE HINGES FEATURE 106 DEGREE OPENING

Distributed by Direct Supply Inc.

1055 36th Street SE, Grand Rapids, MI 49508 | sales@directsupplyinc.com | 616-245-4415

www.directsupplyinc.com

SALICE



IN STOCK SALICE GUIDE Face Frame Self Close Hinges

STOCK FACE FRAME SELF CLOSE HINGE PART NUMBERS

1-1/4" Overlay

- CSR3A99N - 2 CAM - DOWEL

3/4" Overlay

- CSP3499 - 2 CAM - WOOD SCREW
- CSP3499XR - 3 CAM - WOOD SCREW
- CSR3499 - 2 CAM - DOWEL
- CSR3499XR - 3 CAM - DOWEL


1/2" Overlay

- CSP3799 - 2 CAM - WOOD SCREW
- CSP3799XR - 3 CAM - WOOD SCREW
- CSR3799 - 2 CAM - DOWEL
- CSR3799XR - 3 CAM - DOWEL


- LIFETIME WARRANTY
- 11MM CUP DEPTH TO ACCOMMODATE DEEP EDGE PROFILES

Two or Three
Cam Adjustment

2 CAM



3 CAM




Easy Adjustments

Height



Middle Screw
+/- 2 mm

Side




+2.8 mm
- 1.5 mm


Depth



+2.5 mm
- 0.5 mm




K = 2.5MM



Screw-in.
Tornillo para madera.


Press-in - Rapido - Logica
Taco - Rápido - Logica

1/2"



Zero-door protrusion

3/4"



Zero-door protrusion

ALL STOCK FACE FRAME SELF CLOSE HINGES FEATURE 106 DEGREE OPENING

Distributed by Direct Supply Inc.

1055 36th Street SE, Grand Rapids, MI 49508 | sales@directsupplyinc.com | 616-245-4415

www.directsupplyinc.com

SALICE



IN STOCK SALICE GUIDE

European Hinge Overlay Chart
Face Frame Cabinet Application
110 Degree Opening



★ = Preferred Choice

1. FIND YOUR DESIRED OVERLAY IN THE CHART BELOW [1-1/4" | 3/4" | 9/16" | 1/2" | 3/8" | 1/4" | INSET]

2. SELECT A HINGE [SOFT CLOSE | SELF CLOSE WITH DOWELS | SELF CLOSE WITHOUT DOWELS]

3. ORDER HINGE SELECTED & COORDINATING BASEPLATE SHOWN

		HINGE		
SOFT CLOSE DOWELS		C7R6AE9	C7R6DE9	C7R6GE9
SELF CLOSE DOWELS		C2R6A99	C2R6D99	C2R6G99
SELF CLOSE WOOD SCREW		C2P6A99	C2P6D99	C2P6G99
DESIRED OVERLAY WITH 4MM TAB DISTANCE		A	D	G
B A S E P L A T E	BAU3R19 1mm Diecast Face Frame Base Plate	3/4" 19mm	1/2" 12.5mm	3/8" 10mm ★
	BAU3R49 4mm Diecast Face Frame Base Plate	9/16" 15mm	3/8" 10mm	1/4" 6mm
	BAL3R59 5mm Diecast Inset Face Frame Baseplate		INSET USE 3mm TAB	INSET ★
	BAM3R09 0mm Diecase Face Frame Baseplate	1-1/4" 32MM - USE 6mm TAB (K)		

Distributed by Direct Supply Inc.

1055 36th Street SE, Grand Rapids, MI 49508 | sales@directsupplyinc.com | 616-245-4415

www.directsupplyinc.com

SALICE




IN STOCK SALICE GUIDE

European Hinge

Frameless Cabinet Application

110 and 120 Degree Hinge Opening

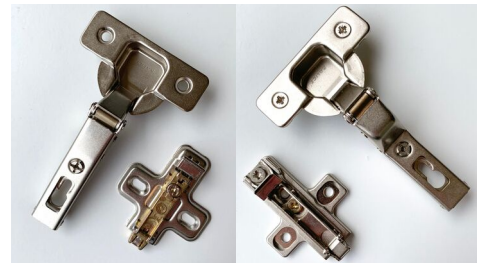

- 1 FIND YOUR DESIRED OVERLAY BELOW [FULL | 1/2" | HALF | INSET]
- 2 SELECT A HINGE [SOFT CLOSE | SELF CLOSE WITH DOWELS | SELF CLOSE WITHOUT DOWELS]
- 3 SELECT A BASEPLATE [DIECAST | STAMPED STEEL]

1	FULL OVERLAY	WOOD SCREW SELF CLOSE	DOWEL SELF CLOSE	DOWEL SOFT CLOSE
		110 DEGREE C2P6A99	C2R6A99	C7R6AE9
		120 DEGREE C2P9A99	C2R9A99	
2	A			
3	DIECAST BASEPLATE	BAR3R09	STEEL BASEPLATE	BAV3L09F

1	1/2" OVERLAY	WOOD SCREW SELF CLOSE	DOWEL SELF CLOSE	DOWEL SOFT CLOSE
		110 DEGREE C2P6D99	C2R6D99	C7R6DE9
		120 DEGREE C2P9D99	C2R9D99	
2	D			
3	DIECAST BASEPLATE	BAR3R29		

1	HALF OVERLAY	WOOD SCREW SELF CLOSE	DOWEL SELF CLOSE	DOWEL SOFT CLOSE
		110 DEGREE C2P6G99	C2R6G99	C7R6GE9
		120 DEGREE C2P9G99	C2R9G99	
2	G			
3	DIECAST BASEPLATE	BAR3R09	STEEL BASEPLATE	BAV3L09F

1	INSET	WOOD SCREW SELF CLOSE	DOWEL SELF CLOSE	DOWEL SOFT CLOSE
		110 DEGREE C2P6P99	C2R6P99	C7R6PE9
2	P			
3	DIECAST BASEPLATE	BAR3R39		

SALICE



IN STOCK SALICE GUIDE

European Hinge

Pie Corner and Thick Door Applications

Face Frame and Frameless Cabinets

PIE CORNER HINGE GUIDE

1 MAIN DOOR - FACE FRAME TO DOOR - 165 DEGREE OPENING

	DOWEL SELF CLOSE HINGE	+	DIECAST BASEPLATE
FRAMELESS - FULL OVERLAY	C2RFA99		BAR3R09
FRAMELESS - 1/2" OVERLAY	C2RFD99		BAR3R29
FRAMELESS - HALF OVERLAY	C2RFG99		BAR3R09
FRAMELESS - INSET	C2RFP99		BAR3R39

	DOWEL SELF CLOSE HINGE	+	DIECAST BASEPLATE
FACE FRAME - 1-1/4" OVERLAY	C2RFA99		BAM3R09
FACE FRAME - 3/4" OVERLAY	C2RFA99		BAU3R19
FACE FRAME - 1/2" OVERLAY	C2RFD99		BAU3R19
FACE FRAME - HALF OVERLAY	C2RFG99		BAU3R19
FACE FRAME - INSET	C2RFP99		BAL3R59


2 PIE CORNER - DOOR TO DOOR [FLIPPER DOOR] HINGE

WOOD SCREW SELF CLOSE HINGE	DOWEL SELF CLOSE HINGE
C2PYA99	C2RYA99
+	DIECAST BASEPLATE
	BAR3R09

THICK DOOR HINGE GUIDE

	WOOD SCREW SELF CLOSE HINGE	+	DIECAST BASEPLATE
FRAMELESS - FULL OVERLAY	CFA7A99		BAR3R09
FRAMELESS - HALF OVERLAY	CFA7G99		BAR3R09

SALICE



IN STOCK SALICE GUIDE

Hinge Accessories

Undermount Soft Close Drawer Slides

Undermount Soft Close Waste Recepticals



HINGE ACCESSORIES

SCREWS STANDARD BASEPLATE OR HINGE - WOOD SCREW #8 3/4 OR 5/8
#6 CAN ALSO BE USED 3/4 OR 5/8

FACE FRAME - 3 CAM HINGES #8 5/8 OR 3/4 TAPERED HEAD SCREW

FACE FRAM - 2 CAM HINGES #8 3/4 TRUSS HEAD SCREWS [PART # VU74X194](#)

REDUCTION FACE FRAME SOFT CLOSE

[PART # SUP337XG](#)

FACE FRAME SELF CLOSE - 1/4" OR 3/4" OVERLAY

[PART # SSP337G](#)

CLIPS

FACE FRAME SELF CLOSE - 1-1/8" OR 1-9/16" OVERLAY

[PART # SSP337AG](#)

STANDARD A, G, D OR P HINGE STOCK - USE

HINGE CUP SPACERS

0.6 MM SPACER

[PART # S2XX86BT](#)

1.2 MM SPACER

[PART # S2XX86AT](#)

1.8 MM SPACER

[PART # S2XX86KT](#)

UNDER MOUNT SOFT CLOSE DRAWER SLIDES

12" - 305mm

[A7555/305 CP6](#)

15" - 381mm

[A7555/381 CP6](#)

18" - 457mm

[A7555/457 CP6](#)

21" - 533mm

[A7555/533 CP6](#)



REQUIRED RIGHT & LEFT CLIP
FOR UNDERMOUNT

[A750.010](#)



OPTIONAL REAR METAL BRACKETS
(for face frame application)

[AGSKXC5](#)




UNDER MOUNT SOFT CLOSE TRASH PULL OUTS

Single 35 Qt. w/ Optional Door Bracket
Requires 12" wide opening

[QPAM12135CR](#)

Double 32 Qt. w/ Optional Door Bracket
Requires 15" wide opening

[QPAM15228CR](#)



Distributed by Direct Supply Inc.

1055 36th Street SE, Grand Rapids, MI 49508 | sales@directsupplyinc.com | 616-245-4415

www.directsupplyinc.com